
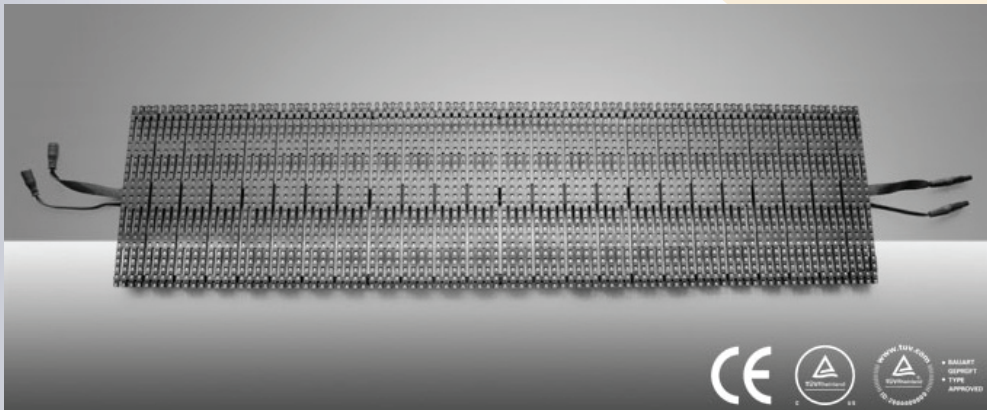


LADDER V12-L specifications

PIXEL PITCH	12.5
LED BRAND	Silan
LED TYPE	3-in-1 SMD
TRANSPARENCY	15%
BRIGHTNESS IN NITS (CD/M2)	1,200
VIEWING ANGLE H/V	>120°
PIXEL DENSITY M2	6400
PIXEL DENSITY SQ.FT.	592
PANEL SIZE (WxHxD) MM	1200x300x20.4
PANEL SIZE (WxHxD) INCH	47.24x11.81x0.80
PANEL SURFACE IN M2	0.36
PANEL RESOLUTION (WXH)	24x96
WEIGHT PER PANEL KG/LB	4.2/9.28
WEIGHT KG-M2 / LB-SQ.FT.	11.68/2.38
POWER CONSUMPTION MAX/AVG PANEL	160
POWER CONSUMPTION MAX W/SQ.FT.	51
INPUT VOLTAGE	110-220
POWER CONSUMPTION MAX W/M2	556
DATA TRANSMISSION	RJ45
REFRESH RATE	1920 Hz
COLORS	68 Billion
OPERATING TEMPERATURE	-20-50°C/-4-122°F
ENVIRONMENT	IP65 (INDOOR)

**Top-of-the-line Cree LED's available as well, please inquire for more details*

All specifications subject to change, please contact us for current specs.

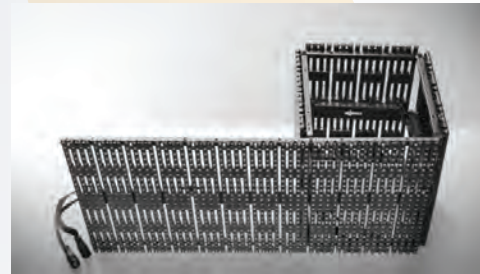

VISIT OUR LED LAB:
475 Greenwich St.
New York, New York 10013

CONTACT:

888.349.8321
info@ic-technologies.tv

ic-technologies.tv

