


# LADDER V25-L specifications

PIXEL PITCH	25mm
LED BRAND	Silan
LED TYPE	3-in-1 SMD
TRANSPARENCY	50%
BRIGHTNESS IN NITS (CD/M2)	2000/2800
VIEWING ANGLE H/V	>120°
PIXEL DENSITY M2	1600
PIXEL DENSITY SQ.FT.	148
PANEL SIZE (WxHxD) MM	1200x292x10.5
PANEL SIZE (WxHxD) INCH	47.24x11.50x0.41
PANEL SURFACE IN M2	0.36
PANEL RESOLUTION (WXH)	12x48
WEIGHT PER PANEL KG/LB	2.9/6.39
WEIGHT KG-M2 / LB-SQ.FT.	8.06/1.64
POWER CONSUMPTION MAX/AVG PANEL	115
POWER CONSUMPTION MAX W/SQ.FT.	30
INPUT VOLTAGE	110-220
POWER CONSUMPTION MAX W/M2	320
DATA TRANSMISSION	RJ45
REFRESH RATE	≥1920 Hz
COLORS	68 Billion
OPERATING TEMPERATURE	-20-50°C/-4-122°F
ENVIRONMENT	IP65 (INDOOR)

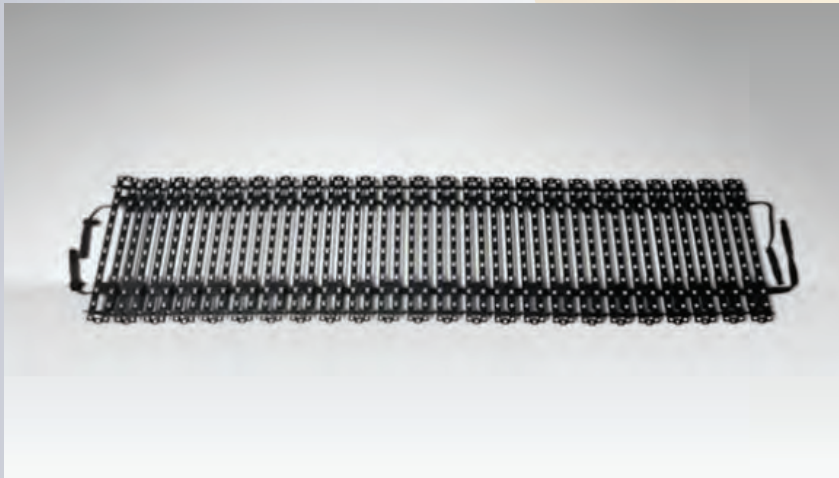

*\*Top-of-the-line Cree LED's available as well, please inquire for more details*

*All specifications subject to change, please contact us for current specs.*

**VISIT OUR LED LAB:**  
475 Greenwich St.  
New York, New York 10013

