


# LADDER V37-L specifications

PIXEL PITCH	37.5
LED BRAND	Silan
LED TYPE	3-in-1 SMD
TRANSPARENCY	57%
BRIGHTNESS IN NITS (CD/M2)	2,100
VIEWING ANGLE H/V	>120°
PIXEL DENSITY M2	711
PIXEL DENSITY SQ.FT.	66
PANEL SIZE (WxHxD) MM	1200x300x1.5
PANEL SIZE (WxHxD) INCH	47.24x9.84x0.45
PANEL SURFACE IN M2	0.36
PANEL RESOLUTION (WXH)	8x32
WEIGHT PER PANEL KG/LB	2.92/6.44
WEIGHT KG-M2 / LB-SQ.FT.	8.11/1.65
POWER CONSUMPTION MAX/AVG PANEL	70
POWER CONSUMPTION MAX W/SQ.FT.	18
INPUT VOLTAGE	110-220
POWER CONSUMPTION MAX W/M2	194
DATA TRANSMISSION	RJ45
REFRESH RATE	1920 Hz
COLORS	68 Billion
OPERATING TEMPERATURE	-20-50°C/-4-122°F
ENVIRONMENT	IP65 (INDOOR)

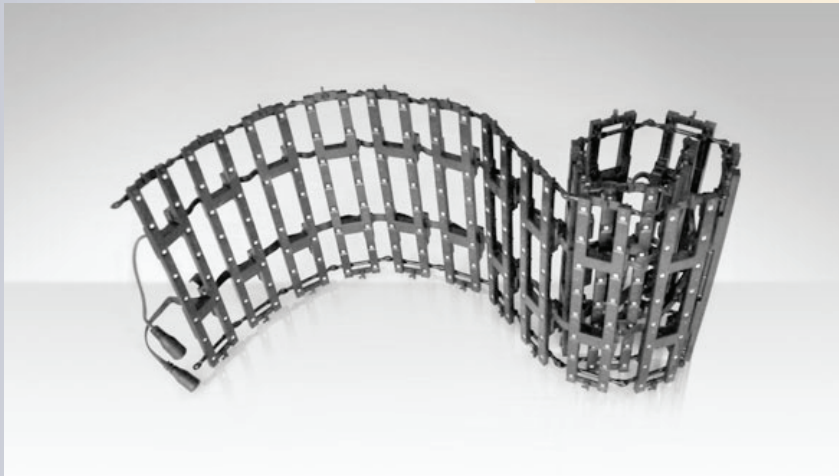

*\*Top-of-the-line Cree LED's available as well, please inquire for more details*

*All specifications subject to change, please contact us for current specs.*

**VISIT OUR LED LAB:**  
475 Greenwich St.  
New York, New York 10013

